



THE LAB EQUIPMENT

Email : sales@thelabequipment.com


Phone: +91-8759245890

Product Name :

Thermoelectric Effects Apparatus

Product Code :

SLE/H/14

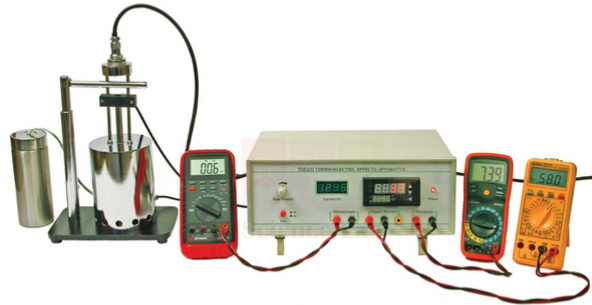

Website: <https://www.thelabequipment.com>, **Email:** sales@thelabequipment.com

plot. no.296. Sector 5. Vaishali. Ghaziabad. Uttar Pradesh 201010



THE LAB EQUIPMENT

Email : sales@thelabequipment.com

Phone: +91-8759245890

Description :

The Thermoelectric Effects Apparatus is designed for 2 types of investigations:

Investigating the thermal characteristics and measuring techniques of 3 devices commonly used for industrial and technical thermometry.

The instruction manual contains sample activities and sample data.

Specifications:

Heater Supply: Regulated Voltage Source: 0- to 36-V DC, 10-turn potentiometer control

Digital Current Display: 0.000 to 1.999 A

Cooling Fan: 12-V DC, 0.14 A, on/off switch control

Digital Controller: Configurable for P, PI, PD, or PID mode

Process Value (PV) Range: 0 to 400° C (factory default—settable)

PV Temperature Display: 4-digit, resolution 1° C or 0.1° C

SV Temperature Display: 4-digit, resolution matches PV

24 settable parameters

2 parameters determined by apparatus configuration

Power Input: 110-V AC, 60 Hz, 65 W

Fuse: Miniature type, 5 x 20 mm, F1.5 A, 250 V

Dimensions: Oven: 13 cm H x 35 cm W x 31 cm D

Brass Heating Block: 40 mm diam x 67 mm H

Weight: 5.2 kg (11-1/2 lb)

Thermocouple (K-type, Chromel-Alumel)

Chromel: Ni, 90%; Cr, 10%

Alumel: Ni, 95%; Mn, 2%; Al, 2%; Si, 1%

The thermocouple generates approximately 4 mV for a temperature difference of 100° C between the hot and cold junctions.

Measurement of the output between room temperature and 100° C can conveniently be made using a digital multimeter with a resolution of 0.01 mV or an appropriate data logger.

The temperature of the ice water should be measured before and after the experiment using independent means, such as a thermometer or temperature probe.