


Product Name :

Jaw Crusher

Product Code :

SLE/AG/06

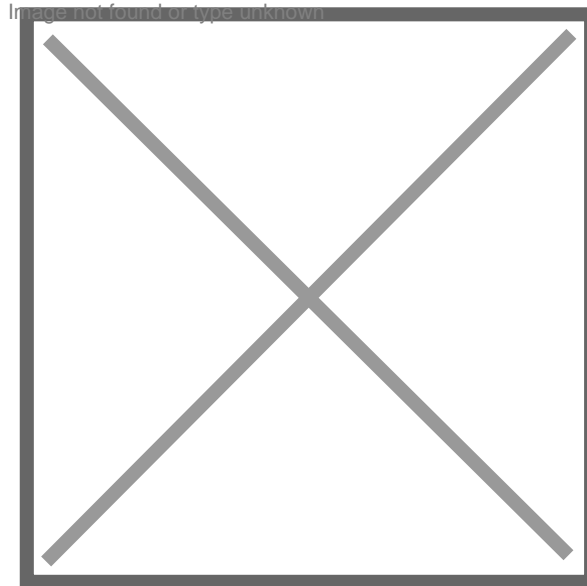

Description :

Manganese steel jaws adjustable up to 6 mm opening
 250 kg materials can be crushed in approx eight hours
 Compact and rugged for laboratory and small production units
 Discharge opening adjustment range: 3 – 10mm
 Supported with strong steel frame
 Voltage: 440 V, Three Phase A.C. Supply
 Designed for speed crushing

| Laboratory Jaw Crusher Size | Feed Size | Discharge Size | Motor | Capacity |
|-----------------------------|-----------------|-----------------|------------------|---------------|
| 4? x 6? (100x150mm) | 25 to 30mm | 6mm to 20mm | 3 H.P. 3 Ph. | 150-200Kg/hr. |
| 6? x 8? (150x200mm) | 45 to 50mm | 10mm to 22mm | 5 H.P. 3 Ph. | 300-400Kg/hr. |
| 8? x 12? (200x300mm) | 65 to 70mm | 12mm to 25mm | 7.5 H.P. 3Ph. | 400-500Kg/hr. |
| 12? x16? (300x400mm) | 90 to 100mm | 15mm to 30mm | 10 H.P. 3 Ph. | 600-750Kg/hr. |
| 15? x24? (375x600mm) | 100 to 150mm | 25mm to 55mm | 15 H.P. 3 Ph. | 1 Ton/hr. |